


SEACUT500S rail

SEACUT400S is a diamond rail saw for cuts in reinforced concrete and masonry of up to a depth of 210 mm. The high-frequency motor is water-cooled, with 3700W output in single-phase and 6500W in three-phase, depending on the electrical availability of the site. To be used with a 2.18 metres long guide rail.

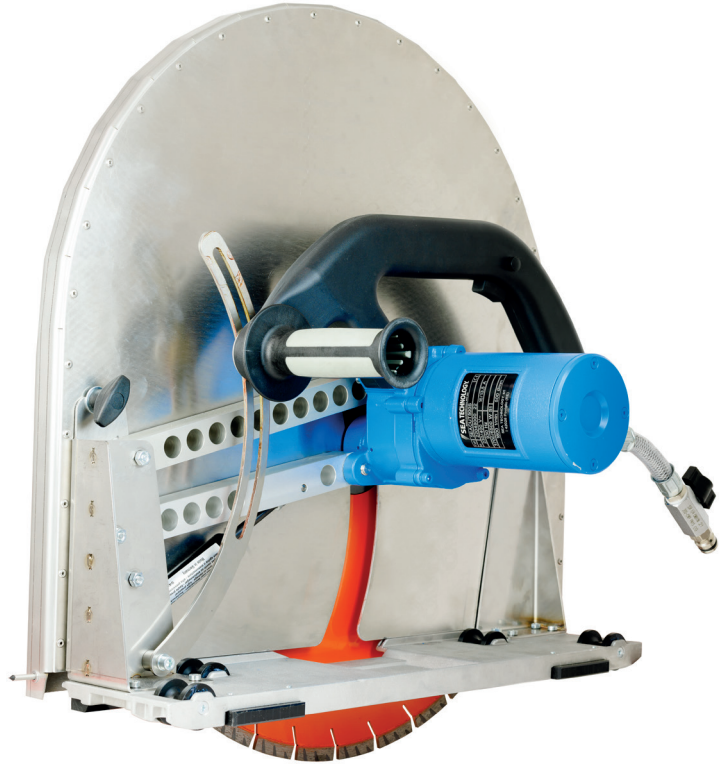

TECHNICAL SPECIFICATIONS

	UoM	SINGLE PHASE	THREE-PHASE
Voltage	V	230	400
Max Power	W	3700	6500
Continuous power	W	2700	4800
Cutting depth	mm	210	210
Ring ø	mm	500	500
Spindle hole	mm	20	20
No. of revs	1/min	1850	1850
Weight	Kg	12,5	12,5

CODE	DESCRIPTION
SEACUT500S	Wall rail saw ø 500mm sliding on guide
SEACUT500S50402	Sliding guide for wall saw ø 500mm
SEACUT400HF6D	Frequency converter